

*With improved functions and specifications, the SRP-350plus is a leap forward in technology.*



Fast printing of text and images to speed up customer transactions without sacrificing performance. The SRP-350plus prints text and graphics at a consistent speed of 62 lines per second which is amazingly 30% faster than the industry leading SRP-350. Reduced data processing time has been achieved by utilizing a more powerful CPU. Increases in performance have been made by upgrading mechanical components and optimizing software. The SRP-350plus guarantees smooth and speedy printing without any interruptions during printing.

- Drop and Print Paper Loading
- Fast Printing Speed of Up To 200mm per Second
- USB 2.0 On Board Standard
- Long Lasting Auto-Cutter Up To 1.8 Million Cuts with Easy Paper-Jam Removal
- Customer Oriented Software Tools Provided
- 2D Barcode Printing Support

### SRP-350plusA



### SRP-350plusC



# Bixolon SRP-350plus Thermal Receipt Printer



## Additional Features

- Improved CPU (32 Bit), Bigger Memory (4 MB), Increased Buffer (64 KB)
- Compatible with Competitor's Emulations Including ECS/POS
- Saves Installation Space (Compact Size, Wall Mount Option)
- Paper-End Sensor / Near-End Sensor
- Easy To Use Software Utilities: Virtual Memory Switch Manager, Non-Volatile Image Download, Firmware Download

## Specifications

<b>Printer Speed – Mono:</b>	200mm per Second / 61.7 Lines per Second
<b>Bar Code:</b>	100mm per Second / 30.9 Lines per Second
<b>2-Color:</b>	90mm per Second / 27.8 Lines per Second
<b>Printing Method:</b>	Direct Thermal
<b>Resolution:</b>	180 dpi (7dot/mm); 203 dpi (8dot/mm) Optional
<b>Characters Per Line:</b>	Font A: 42; Font B: 56
<b>Character Size:</b>	Font A: 12 x 24; Font B: 9 x 17
<b>Paper Size:</b>	79.5mm ± 0.5mm x 83mm Max. Diameter
<b>Paper Supply:</b>	Drop and Print
<b>Reliability (MCBF) –</b>	
<b>Printer:</b>	70,000,000 Lines
<b>Auto Cutter:</b>	1,800,000 Cuts
<b>TPH:</b>	150,000,000 (Up to Pulse 150 km)
<b>Character Set:</b>	Alphanumeric: 95 International: 32
<b>Extended Graphic:</b>	128 x 33 Page (1 Space Page)
<b>Barcode – 1D:</b>	EAN-13 / EAN-8 / Code 39 / Code 93 / Code 128 / ITF / Coda Bar / UPC-A / UPC-E
<b>2D (Option):</b>	PDF417 / QR Code
<b>Interpreter:</b>	ESC/POS
<b>Interface:</b>	Serial, Parallel, USB, Ethernet and Bluetooth
<b>Driver:</b>	WIN 95/98/ME/2000/NT/XP/2003 Server/VISTA/OPOS
<b>Buzzer:</b>	Internal (Standard)
<b>Drawer Port:</b>	1 Port (Maximum 2 Drawers)
<b>Data Buffer:</b>	64 Kb
<b>Power Supply:</b>	AC 100V ~ 240V Adapter Included
<b>Current/Power Usage:</b>	0.30A / 36W
<b>Operating Temperature:</b>	32° ~ 112°F (0° ~ 45°C)
<b>Operating Humidity:</b>	10% ~ 90% (Non-Condensing)
<b>Dimensions:</b>	7-9/16"L x 5-11/16"W x 5-7/8" H
<b>Weight:</b>	4.3 lbs. (1.92 kg)
<b>Options:</b>	Splash Proof Cover, Wall Mount Bracket, Internal/External Buzzer


All product features are subject to change without notice.



Drop and Print Paper Loading



Standard Cable Cover

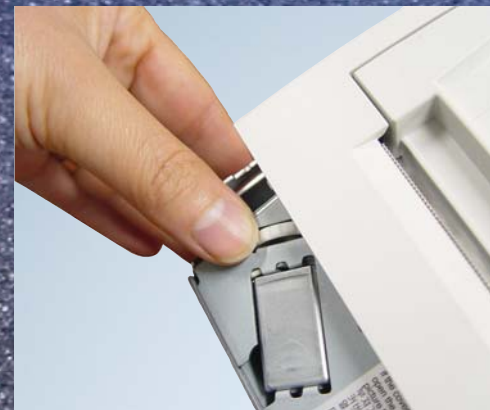

Easy Paper-Jam Removal



Easy to Change Interface Modules  
with USB 2.0 On Board Standard